

K-FLEX CLAD™ IN SYSTEMS


on-site installation using
sheet sections

ON SITE

For on-site insulations it is possible to order the various sections based on technical drawings for linear tubes, curves, "T" couplings, flanges and valves. Each section is produced using high-pressure water machine making them easy to install on-site.

STRAIGHT PIPES

ELASTOMERIC INSULATION WITH
IN CLAD COVERING

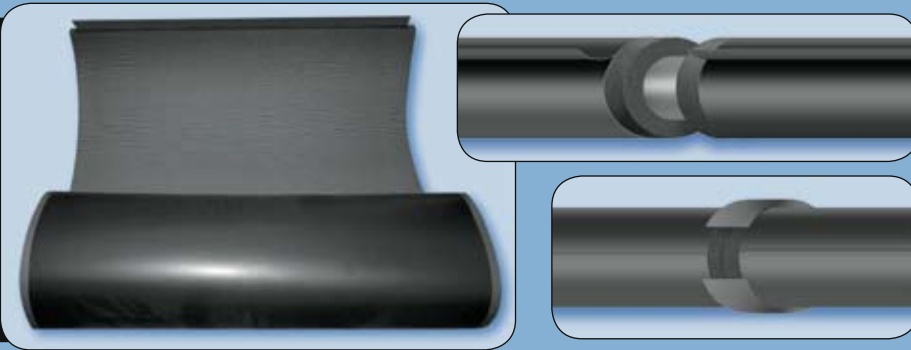

The preformed IN CLAD sheets for pipes with diameters greater than 168 mm are supplied with a 5 cm elastomeric overlap at both ends and a 5 cm IN CLAD longitudinal overlap to facilitate installation.


The end joints should be covered with the special IN CLAD band and fixed down with marine sealant.

"T" PIECES

ELASTOMERIC INSULATION




IN CLAD COVERING

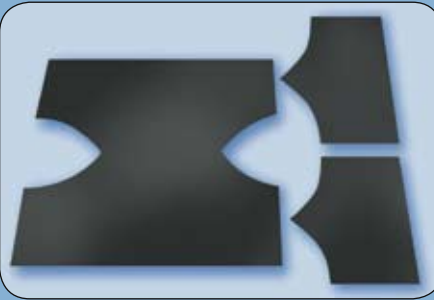


The "T" pieces are made in three pieces which should be directly applied onto the elastomeric sections (two pieces). First install the main section of the "T" connection followed by the coupling sections.

ELBOWS

ELASTOMERIC INSULATION



IN CLAD COVERING

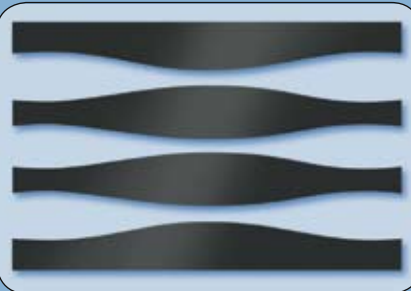

To cover the elbow, the appropriate number of "fish" IN CLAD sections are created and layed over either K-FLEX ST or ECO elastomeric insulation.

